

HungerRush POS Terminal - 6100

Hardware That Works as Hard as You Do.

Modern Touchscreen POS Designed for Speed and Simplicity

Built for the rush. The HungerRush 6100 POS Terminal pairs a sleek, durable design and responsive touchscreen with an optional customer-facing display —improving speed, order accuracy, and tipping, while connecting guests with your brand at checkout.



Key Features

- **Touchscreen display:** 15.6" edge-to-edge screen that's fast, durable, and easy to clean
- **Optional rear display:** 10.1" customer-facing screen supports digital tipping and engagement
- **High-performance design:** Fanless Intel® 11th Gen processor ensures quiet, reliable operation
- **Durable construction:** Built to withstand frequent use and daily cleaning
- **Integrated reader support:** Handles physical gift cards and manager cards

Accuracy, Engagement, and Performance at Every Checkout

Ensure order accuracy

Customer-facing display provides real-time visibility and reduces errors.

Strengthen brand engagement

Idle screen doubles as a built-in marketing tool for promos and loyalty.

Boost staff tips and retention

Rear-display prompts make tipping simple and consistent.



Deliver lasting performance


Sleek, durable design built for restaurant life.

Simplify operations


Seamlessly connected across the HungerRush platform.

System	CPU	Intel® Celeron® 6305E (11th Gen, fanless)
	Memory	1 × DDR4 260-pin SO-DIMM (8 GB)
	Storage	1 × M.2 2242 / 1 × M.2 2280 (SATA interface)
	Operating System	Windows 10
Display	Primary Display	15.6" TFT LCD, 1366×768 or 1920×1080 resolution, 220 cd/m² brightness
	Touchscreen	Bezel-free projected capacitive (P-CAP) touch panel (USB interface)
	Optional Customer Display	10.1" touchscreen
	Audio	Integrated 2 W speaker
Connectivity	Network	1 × RJ45 (10/100/1000 Mbps), 1 × M.2 Key E (2230) for Wi-Fi
	USB	Rear I/O – 2 × USB 2.0, 2 × USB 3.1, 1 × USB Type-C; Side – 1 × USB 2.0
	Serial	2 × RJ45 (RS-232, 5V/12V selectable)
	Display Output	1 × Mini DP, 1 × HDMI 1.4
	Cash Drawer	1 × RJ11 (+12 V or +24 V selectable, default +12 V)
	DC In	1 × 4-pin DC power jack (DIN)
	Optional	1 × USB 2.0 / 24 V Power USB or DC Out
Dimensions & Weight	POS Only	375.68 × 287.43 × 194.95 mm (4.23 kg)
	POS + 2nd Display	375.68 × 287.43 × 213.26 mm (5.33 kg)
	Mounting	VESA 75 × 75 mm
Environment	Operating Temperature	32° – 95 °F (0° – 35 °C)
	Storage Temperature	23° – 140 °F (–5° – 60 °C)
	Humidity	20 % – 90 % (non-condensing)
	Certifications	CE / FCC
Optional Add-Ons	MSR	JIS I, II; ISO Track 1 + 2 + 3 (USB interface)
	Customer Display	10.1" touchscreen (P-CAP)


Front View

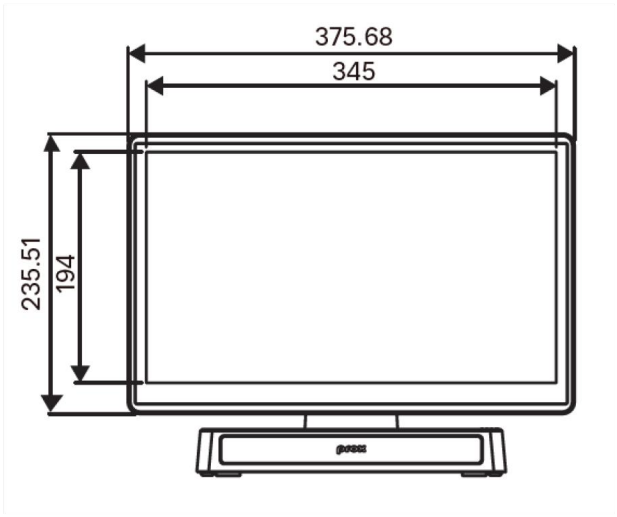

Side View

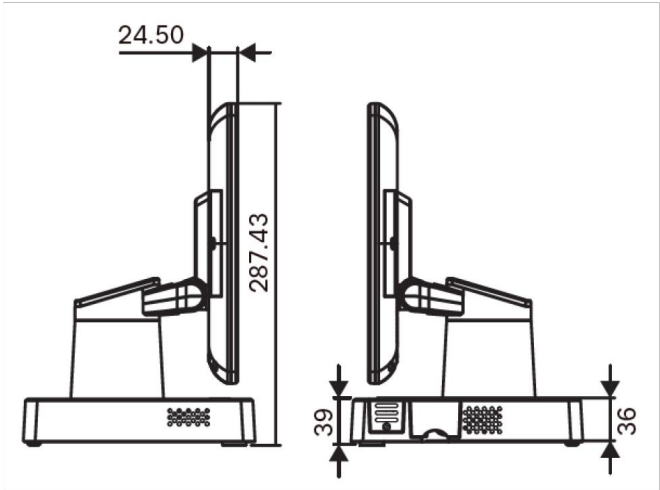

Rear I/O

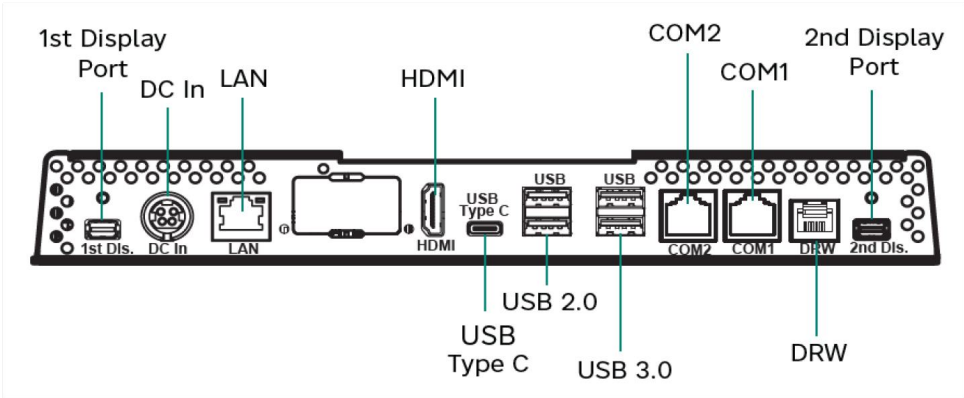

About HungerRush

HungerRush is a leading provider of integrated restaurant technology solutions. We partner with restaurants of all sizes and cuisine types—from single locations to multi-unit brands. Backed by restaurant, technology, and marketing experts who are *always by your side*, our cloud-based POS Platform connects digital ordering, delivery, guest engagement, kitchen operations, reporting, marketing, and payment processing in one system.

Ready to Get Started?

Setup is fast and easy, and our dedicated team is here to guide you every step of the way.